


Auto Decoiler 自動線架

Decoiler

+ Features

自動線架 Auto | 伺服線架 Servo

- | | |
|----------------|--|
| 1.適用油淬火線材與一般鋼線 | 1. Apply to oil temper wire material and standard steel wire |
| 2.斷線感應偵測 | 2. Wire-breaking reacting detection |
| 3.全面安全防護網 | 3. The whole of safety protecting equipment |
| 4.出線擺動弧度小 | 4. Feeding wire swing radian decrease |
| 5.輪式出線座 | 5. Feeding wire pulley block |
| 6.彈簧生產穩定 | 6. Spring produce stable |
| 7.與機台同步運作 | 7. Machine produce simultaneity |

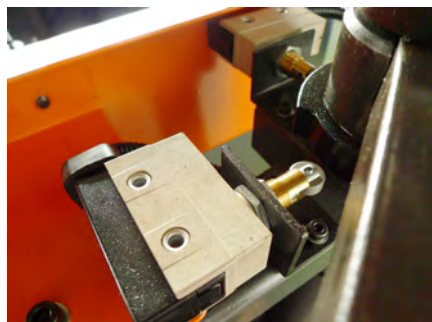

▲T-500 | T-1000S



▲T-1000 | T-1500



T-2000 ▶

自動線架

	T-500	T-1000S	T-1000	T-1500	T-2000
最高轉速(每分鐘轉速) Max. Rotation Speed(rpm)	45	45	35	23	23
線架轉向 Decoiler Rotation	正反向Versatile	正反向Versatile	正反向Versatile	正反向Versatile	正反向Versatile
承載重量(公斤) Capability Load(kgs)	500	1000	1000	1500	2000
使用線徑(公釐)(2000 N/mm ²) Wire Capacity(mm)	Ø0.8 ~ Ø5.0	Ø0.8 ~ Ø5.0	Ø3.0 ~ Ø8.0	Ø3.0 ~ Ø8.0	Ø4.5 ~ Ø12.0
搭配機器 Collocation Machine	Y-1630M	Y-1630M/Y-1650M	Y-1650M	Y-1680M	Y-16100 / Y-16120
機台本體尺寸(公釐) Machine Body Dimension(mm)	長 Length	1800 mm	1800 mm	2320 mm	3100 mm
	深 Depth	1650 mm	1650 mm	2210 mm	3100 mm
	高 Height	1000 mm	1000 mm	1400 mm	1400 mm
承料子架(內徑)(公釐) Loading Frame Diameter(I.D.)(mm)	Ø 1300	Ø 1300	Ø 1900	Ø 1900	Ø 2000
機台重量(公斤) Machine Weight(kgs)	300 kgs	400 kgs	500 kgs	530 kgs	1350 kgs