


Y SERIES

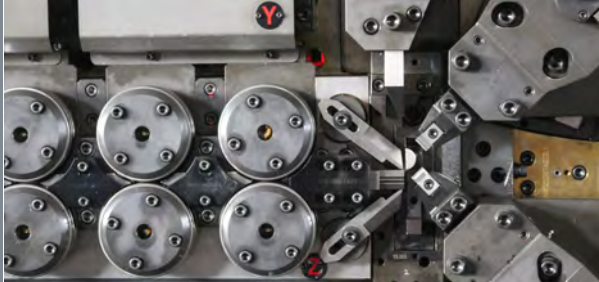

MIT
Made in Taiwan

彈簧機
Spring Coiling Machine

1981
since
trsma.com.tw

Y-16160



Industry
4.0



Windows

安川控制器
YASKAWA
Controller



+ Features

軸數
Controlled Axes 10



送料
Feed Roller System

1



切刀
Cutter

1



節徑板
Pitch Tool

1



節徑插刀
Wedge Pitch Tool

1



外徑擋曲
External Diameter Block Hold

2



內控座升降
Arbor Seat Up / Down

1




內控座伸縮(選購品)
Arbor Seat In / Out(optional)

1



初張力(選購品)
Spring Initial Tension (optional)

2



- 操作介面均採用圖形表示
3D-graphic operation interface
- 3D圖形預覽功能·減少材料損耗
To reduce material loss by 3D picture preview function
- 曲線功能可拖曳節點直接更改參數
To change the parameter directly by dragging way in line curves function
- 紀錄刀具位置圖片·加快下次調機速度
Add cutting tool placement record picture to quicken adjust machine speed
- 內建常用彈簧樣式·可以直接選擇所要彈簧樣式做編輯。
Built-in common types springs, just one touch the spring graph on screen to edit its parameter



選購品Optional / 防護罩Safety Cover

Y-16160

線徑範圍(公釐) Wire Capacity(mm)	Ø 8.0 ~ Ø 16.0 mm	機臺本體尺寸(公釐) Machine Body Dimension(mm) 不含螢幕與電控箱 Electronic Control Box And Screen Excluded	長 Length	4500 mm
彈簧最大外徑(公釐) Max. Spring O.D.(mm)	Ø 250 mm		深 Depth	2200 mm
送線速度(米/分) Feed Speed(m/min)	65 m / min (Standard)		高 Height	2610 mm
生產速度(米/分) Production Speed(m/min)	62 pcs/min (Standard)	機臺安全操作 佔地面積(公釐) Safety Operation Location Area(mm)	長 Length	16000 mm
抗拉強度(牛頓/平方公釐) Tensile Strength(N/mm ²)	2000 N/mm ²		深 Depth	11000 mm
旋繞比 Spring Index	≥ 3	機臺重量(公斤) Machine Weight(kgs)		17000 kgs

選購品 Optional

- § 彈簧影像量測系統(光學) Spring Image Measuring System(Optics)
- § CE安全裝置 CE Safety Equipment
- § T-2500自動線架 Auto Decoiler
- § 捲頭圈 First-coil Coiler
- § 即時補正系統 The system of spring timely correction

線架 T-2500 ※ 3200×3150×1200 mm
電控箱 ※ 1200×2500×2350 mm
操作面板 ※ 800×950×1850 mm