

Y-16250




Industry
4.0



Windows

安川控制器
YASKAWA
Controller



+ 特長


軸數
Controlled Axes 12

- 送料
Feed Roller System 1
- 切刀
Cutter 1
- 節徑板
Pitch Tool 1
- 節徑插刀
Wedge Pitch Tool 1
- 外徑擋曲
External Diameter Block Hold 2
- 內控升降
Arbor Seat Up / Down 1
- 內控伸縮(選購品)
Arbor Seat In / Out(optional) 1
- 初張力(選購品)
Spring Initial Tension (optional) 2



- 操作介面均採用圖形表示
3D-graphic operation interface
- 3D圖形預覽功能·減少材料損耗
To reduce material loss by 3D picture preview function
- 曲線功能可拖曳節點直接更改參數
To change the parameter directly by dragging way in line curves function
- 紀錄刀具位置圖片·加快下次調機速度
Add cutting tool placement record picture to quicken adjust machine speed
- 內建常用彈簧樣式·可以直接選擇所要彈簧樣式做編輯·
Build-in common types springs, just one touch the spring graph on screen to edit its parameter

選購品Optional

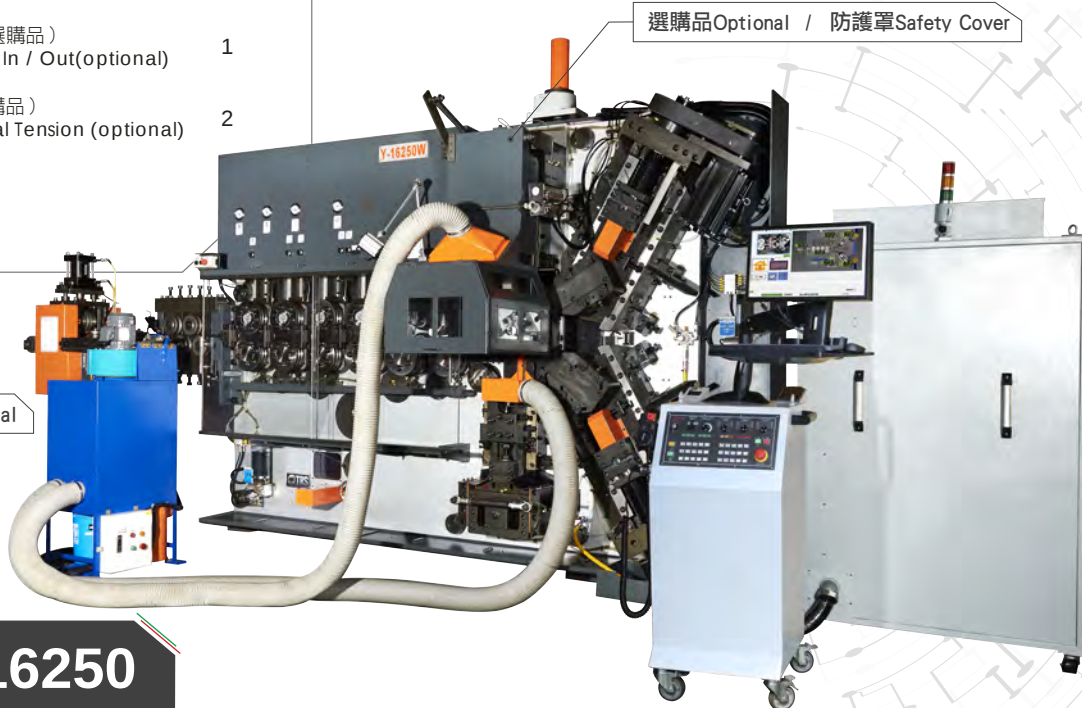

選購品Optional / 防護罩Safety Cover

Y-16250

線徑範圍(公釐) Wire Capacity(mm)	Ø 13.0 ~ Ø 25.0 mm	機臺本體尺寸(公釐) Machine Body Dimension(mm) 不含螢幕與電控箱 E Electronic Control Box And Screen Excluded	長さ Length	5800 mm
彈簧最大外徑(公釐) Max. Spring O.D.(mm)	Ø 300 mm		奥行 Depth	2300 mm
送線速度(米/分) Feed Speed(m/min)	32 m / min (Standard) 65 m / min (High Speed)		高さ Height	2820 mm
生產速度(條/分) Production Speed(pcs/min)	20 pcs/min (Standard) 30 pcs/min (High Speed)	機臺安全操作 佔地面積(公釐) Safety Operation Location Area(mm)	長さ Length	17300 mm
抗拉強度(牛頓/平方公釐) Tensile Strength(N/mm ²)	WDØ13 - Ø20 → 2000 N/mm ² WDØ20 - Ø25 → 1300 N/mm ²		奥行 Depth	11000 mm
旋繞比 Spring Index	≥ 3	機臺重量(公斤) Machine Weight(kgs)		25000 kgs

選購品 Optional

§ 彈簧影像量測系統(光學) Spring Image Measuring System(Optics)

§ CE安全裝置 CE Safety Equipment

§ T-2500自動線架 Auto Decoiler

§ 捲頭圈 First-coil Coiler

§ 即時補正系統 The system of spring timely correction

線架 T-2500 ※ 3200×3150×1200 mm

電控箱 ※ 1200×2500×2350 mm

操作面板 ※ 800×950×1850 mm